

Mentor II

Digital DC Drive
25 A-1850 A



Mentor II: the most versatile DC systems drive in the world



The Mentor II provides a **wide power range of fully programmable DC drives with a unified control interface.**

Simple stand-alone applications are quickly configured with a minimum of parameters. Add the application module (MD29) to implement high performance drive systems with local intelligence. This intelligence can then be utilised to eliminate the master PLC by constructing

a distributed control system, using the CTNet fieldbus with the System Programming Tool (SYPT). When integration with a master PLC system is required, a range of fieldbus adapters is available.

- Wide range of network communication options
- Integrated communication to PLC and host computer
- User configurable analogue and digital drive inputs
- Reduced commissioning time with simplified drive set-up
- Elongation or shrinkage control through position synchronisation
- Constant 'web' tension by continuous torque adjustment
- Easy to use PC configuration Software: Mentorsoft.

Simple Operation

Easy set up of the drive can be done using the main control panel or via a standard communications interface from a host computer.

All operating parameters are organised into logically structured function menus.

Fast configuration of standard applications can be achieved using 10 parameters or less.

Faster Drive Set-Up

Programming the Mentor II has never been easier. Designed to save commissioning time the drive has comprehensive data displays, easily assimilated function menus and a five-key control panel.

Better Control

A comprehensive self-tuning algorithm gives improved current loop performance for a more uniform response at all speeds. Drive performance is also enhanced with full PID digital speed control.

More Functions

The main circuit board has been developed to incorporate many additional features as standard not as costly options. These include serial communications and a field-weakening controller for constant power applications (M25 - M210 R).

Massive Systems Potential

All analogue inputs and most of the digital control inputs are user-configurable, making Mentor II a true systems drive having more versatility and flexibility than ever before.

Wide Ranging, More Flexible Communications


A standard RS485 port enables Mentor II to communicate directly with PLCs and host computers.

Optical Isolation means that a number of drives can be multi-dropped onto a standard RS485 interface for networking with other control devices.

A port is also provided to accept interface cards for CT Net, Profibus-DP, Interbus S and DeviceNet.

Mentorsoft

WINDOWS™ Based commissioning tool

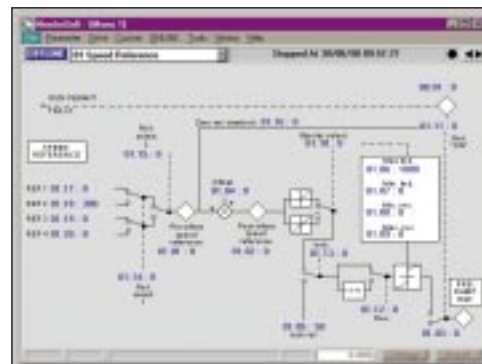

A flexible digital DC drive for multiple plant applications



Standard Features

- Microprocessor based control circuits
- Logical push-button programming
- Advanced auto-diagnostics
- Software expandable
- Regeneration up to $1.15 \times V_{RMS}$
- Serial interface - RS232/485
- Non-volatile memory for parameter storage
- Single and four quadrant models
- Armature voltage, tacho or encoder feedback
- Phase sequence tolerant
- 0.025% resolution for analogue speed demand
- 0.1% speed holding for 100% load change with tacho feedback
- Field loss protection
- Electronic motor-overload protection
- Feedback loss protection
- Phase loss protection
- 150% overload capacity for 30 seconds
- Taper current limit
- Armature current slew rate limiting

Easy Expansion

Application Module (MD29)

- Easy plug in second processor
- Cost saving facility to write application specific programs without the need to use a PLC or stand alone controller
- Programmed using DPL or SYPT an IEC 1131 compliant programming tool incorporating ladder and function block programming.
- Embedded single axis position controller

CT Net Interface (MD29AN)

- High speed network protocol
- De-centralised "peer-to-peer" networking requiring no master PLC controller
- Programmed using SYPT

Profibus-DP Interface (MD24)

- High speed network protocol
- Works on a centralised network system
- Generic configuration file available for Siemens S5 PLC

DeviceNet Interface (MD25)

- High speed network protocol using the CAN hardware layer
- Works on a centralised network system
- EDS files available

Interbus-S Interface (MDIBS)

- Easyfit interface card for Interbus-S network communications
- Works as a centralised master controller
- 500 kbit/sec fixed data rate
- Network loss detection

Expansion I/O Module (I/O box)

- Connects to the MD29 using RS485 comms and provides remote I/O capability
- 5 analog inputs
- 3 analog outputs
- 8 digital inputs
- 8 digital outputs
- Digital I/O expandable to 32 inputs and 32 outputs
- Up to 15 I/O Boxes can be controlled on one serial communications link
- 100 metres (330 feet) maximum serial - communications cable length

Field Controller For DC Motors (FXM5)

- Armature voltage feedback 220 V to 600 V DC
- Field current to 20 A
- 1phase input
- Half or fully controlled thyristor output

Multiple application solutions

Digital Speed And Position Loop

This allows several drives to be run in speed or position synchronisation. Shaft positions can be offset or an adjustable speed ratio introduced to control elongation or shrinkage in applications such as plastics extrusion, wire drawing and textile manufacture.

Centrewinder

Designed for maintaining a constant 'web' tension in coiling and uncoiling applications mainly in the paper, wire, plastics and metals industries.

The drive torque is continuously adjusted to compensate for changing coil diameter, machine losses and coil inertia.

Shaft Orientation

This allows the user to specify the final position of the motor shaft relative to an electronic feedback datum, for example a marker pulse from an encoder. The position is adjusted by simply changing the value of the appropriate parameter. An output signal is provided on completion of orientation. This

function is widely used for CNC machine tool-changing and other automated applications.

Field Controller

On drives from M25 - M210/R the MDA3 controller is fitted as standard. The field controller provides total control over the motor field current such that a constant kW characteristic can be obtained.




This facility is particularly useful for constant power applications such as machine tools, mixers, coilers and winders.

An integral field failure detector ensures full protection, and full digital control assists commissioning and operation. A fixed field supply is provided on units in the range M350 - M1850. For applications requiring a field controller of up to 20 A the FXM5 is available.

'S' Ramp

This facility provides a curved function at each end of a user defined acceleration/ deceleration ramp. The 'S' ramp in each quadrant is determined by parameters which control the linear part and the curved part of the 'S' respectively.

Due to the greater smoothness and progressive speed transitions, typical applications are lifts, hoists, cranes and conveyors.

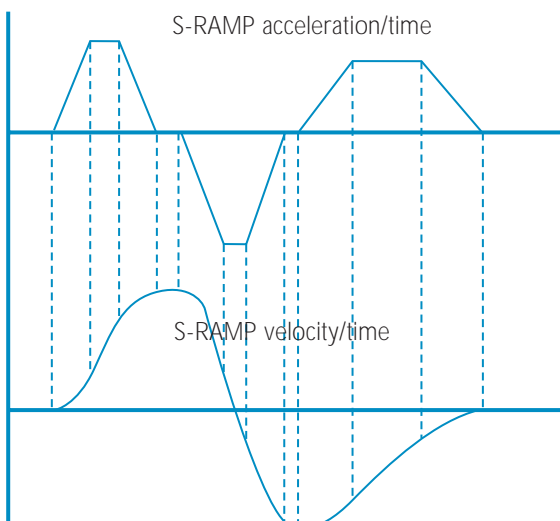

Technical data

DRIVE RATINGS					
Drive type & Model		Typical (1) Motor Rating @ 400 DC		Maximum Continuous Current Rating (Amps)	
Single Quadrant	Four Quadrant	KW	HP	AC Input	DC Output
M25	M25R	7.5	10	21	25
M45	M45R	15	20	38	45
M75	M75R	30	40	60	75
M105	M105R	37.5	50	88	105
M155	M155R	56	75	130	155
M210	M210R	75	100	175	210
M350	M350R	125	168	292	350
M420	M420R	150	200	350	420
M550	M550R	200	268	460	550
M700	M700R	250	335	585	700
M825	M825R	300	402	690	825
M900	M900R	340	456	750	900
M1200	M1200R	450	603	1000	1200
M1850	M1850R	750	1105	1540	1850

- (1) This rating may be increased at higher armature voltage.
- (2) DC fuses must be fast semiconductor type, with a rated voltage of 500V DC for 400V supply and 700V DC for 480V supply.
- (3) The cable sizes are for 3-core (3-wire) and 4-core (4-wire) pvc-insulated armoured (conduited) cable with copper conductors, and laid in accordance with defined conditions.
- (4) Typical wire gauge sizes based on 300C (860F) ambient, 1.25 x rated current, 750C (1670F) copper wire with no more than 3 conductors in a conduit or raceway. Branch circuit protection must be provided by the user. All wiring must conform to NEC Art. 310 and applicable electrical codes.
- (5) Not required for Single Quadrant. May not be required in applications where load inertia is low and regeneration infrequent.
- (6) Refer to NEC Table 310-16 for wire sizes.
- (7) M25 - M210 fitted with MDA3 field controller as standard.
- (8) Fixed voltage. Optional field controller FXM5 available.

INSTALLATION DATA								
Drive Type & Model		Recommended Fuse Ratings			Typical Cable Size AC Input & DC Output		Cooling Method	Max Field Current Rating (A)
Single Quadrant	Four Quadrant	HRC AC In (A)	AC In (A)	DC Out (A)	mm ² (3)	AWG (4)		
M25	M25R	32	35	40 (5)	4mm ²	10	Convection	8 (7)
M45	M45R	50	60	70 (5)	6mm ²	6	Convection	8 (7)
M75	M75R	100	100	125 (5)	25mm ²	2	Convection	8 (7)
M105	M105R	100	125	175 (5)	35mm ²	1/0	Fan Cooled	8 (7)
M155	M155R	160	175	250 (5)	50mm ²	3/0	Fan Cooled	8 (7)
M210	M210R	200	250	300 (5)	95mm ²	300MCM	Fan Cooled	8 (7)
M350	M350R	355	400	550 (5)	150 mm ²	(6)	Fan Cooled	10 (8)
M420	M420R	450	500	700 (5)	185mm ²	(6)	Fan Cooled	10 (8)
M550	M550R	560	700	900 (5)	300mm ²	(6)	Fan Cooled	10 (8)
M700	M700R	630	900	1000 (5)	2x185mm ²	(6)	Fan Cooled	10 (8)
M825	M825R	800	1000	1200 (5)	2x240mm	(6)	Fan Cooled	10 (8)
M900	M900R	1000	1200	2x700 (5)	2x240mm ²	(6)	Fan Cooled	20 (8)
M1200	M1200R	1250	2x700	2x900 (5)	3x400mm ²	(6)	Fan Cooled	20 (8)
M1850	M1850R	2000	2x1200	2x1000 (5)	3x400mm ²	(6)	Fan Cooled	20 (8)



driving the world...



Control Techniques Drive & Application Centres

AUSTRALIA
Melbourne Application Centre
A.C.N. 003 815 281
Tel: 61 973 8177
Fax: 61 9729 3200
After Hours: 61 2 9963 5271

Sydney Drive Centre
A.C.N. 003 815 281
Tel: 61 2 9838 7222
Fax: 61 2 9838 7764
After Hours: 61 2 9963 5271

AUSTRIA
Linz Drive Centre
Tel: 43 7229 789480
Fax: 43 7229 7894810
After Hours: 43 7215 3502

BELGIUM
Brussels Drive Centre
Tel: 32 2725 2721
Fax: 32 2725 4940

CANADA
Toronto Drive Centre
Tel: 1 905 475 4699
Fax: 1 905 475 4694

CHINA
Shanghai Drive Centre
Tel: 86 21 64085747
Fax: 86 21 64083282

CZECH REPUBLIC
Brno Drive Centre
Tel: 420 541 192111
Fax: 420 541 192115
After Hours: 420 603 841983

DENMARK
Arhus Application Centre
Tel: 45 8625 5755
Fax: 45 8625 1755
After Hours: 45 4369 6100

Copenhagen Drive Centre
Tel: 45 4369 6100
Fax: 45 4369 6101
After Hours: 45 4369 5100

FINLAND
Helsinki Drive Centre
Tel: 358 985 2661
Fax: 358 985 26823
After Hours: 358 500 423271

FRANCE
Leroy Somer
Angouleme Drive Centre
Tel: 33 5 4564 5454
Fax: 33 5 4564 5400

GERMANY
Bonn Drive Centre
Tel: 49 2242 8770
After Hours: 49 1714 964777

Chemnitz Drive Centre
Tel: 49 3722 52030
Fax: 49 3722 520330
After Hours: 49 1714 964777

Darmstadt Drive Centre
Tel: 49 6251 17700
Fax: 49 6251 177098
After Hours: 49 1714 964777

Stuttgart Drive Centre
Tel: 49 7156 95560
Fax: 49 7156 955698
After Hours: 49 1714 964777

HOLLAND
Rotterdam Drive Centre
Tel: 31 1844 20555
Fax: 31 1844 20721
After Hours: 31 1844 20555

HONG KONG
Hong Kong Application Centre
Tel: 852 2979 5271
Fax: 852 2979 5220

HUNGARY
Budapest Drive Centre
Tel: 36 1 431 1160
Fax: 36 1 260 5483

INDIA
Bombay Application Centre
Tel: 91 20 751201/751202/750930
Fax: 91 20 750105
After Hours: 91 44 4984868

Calcutta Application Centre
Tel: 91 33 357 5302/357 5306
Fax: 91 33 357 3435
After Hours: 91 44496 1083

Madras Drive Centre
Tel: 91 44 4961123/4961130/4961083
Fax: 91 44 4961602

New Delhi Application Centre
Tel: 91 11 576 4782
Fax: 91 11 576 4782
After Hours: 91 44 4984868

INDONESIA
Jakarta Drive Centre
Tel: 62 21 4525146
Fax: 62 21 4525142
After Hours: 62 81 687 0443

Surabaya Application Centre
Tel: 62 31 5682775/5623565
Fax: 62 31 5622402
After Hours: 62 81 687 0443

IRELAND
Dublin Drive Centre
Tel: 353 45 433044
Fax: 353 45 433622

ITALY
Milan Drive Centre
Tel: 39 02575 751
Fax: 39 02575 12858
After Hours: 39 02575 751

Vicenza Drive Centre
Tel: 39 0444 396200
Fax: 39 0444 341317

KOREA
Seoul Application Centre
Tel: 82 2 3445 6183/6184/6185
Fax: 82 2 3445 6181
After Hours: 82 23 445 6183
/82 11 732 9676

MALAYSIA
Kuala Lumpur Drive Centre
Tel: 60 3734 9776
Fax: 60 3733 9592
After Hours: 60 12 333 8355

NORWAY
Oslo Application Centre
Tel: 47 32 235100
Fax: 47 32 235101
After Hours: 47 92 22 3292

REPUBLIC OF SOUTH AFRICA
Johannesburg Drive Centre
Tel: 27 11 462 1740
Fax: 27 11 462 1941
After Hours: 27 11 462 1740

● Drive & Application Centres
● Distributors

RUSSIA
Moscow Application Centre
Tel: 7 095 232-9472
Fax: 7 095 956-4862
After Hours: 91 44496 1083

SINGAPORE
Singapore Drive Centre
Tel: 65 271 6377
Fax: 65 272 1302

SPAIN
Barcelona Drive Centre
Tel: 34 93 680 1661
Fax: 34 93 680 0903
/34 93 680 0763
/34 93 680 2823
After Hours: 34 610 554540

Bilbao Application Centre
Tel: 34 94 620 3646
Fax: 34 94 681 1406

Valencia Drive Centre
Tel: 34 96 154 2900
Fax: 34 96 153 2906

SWEDEN
Stockholm Application Centre
Tel: 46 8 554 24100
Fax: 46 8 554 24120

SWITZERLAND
Lausanne Application Centre
Tel: 41 21 634 0408
Fax: 41 21 635 8596
After Hours: 41 79 357 8683

Zurich Drive Centre
Tel: 41 56 201 4242
Fax: 41 56 201 4243
After Hours: 41 79 357 8683

TAIWAN
Taipei Application Centre
Tel: 886 22325 9555
Fax: 886 22705 9131

THAILAND
Bangkok Drive Centre
Tel: 66 2580 7644
Fax: 66 2591 4559
A/Hours Sales: 66 1443 4095-7
A/Hours Service: 66 1443 4098

TURKEY
Istanbul Drive Centre
Tel: 90 216 4182420
Fax: 90 216 4182423
After Hours: 90 216 418 2420

UNITED KINGDOM
Telford Drive Centre
Tel: 44 1952 213700
Fax: 44 1952 213701
After Hours: 44 1952 213700

Leeds Drive Centre
Tel: 44 113 2423400
Fax: 44 113 2423892
After Hours: 44 113 2423400

Luton Drive Centre
Tel: 44 1582 567700
Fax: 44 1582 567703
After Hours: 44 1582 567700

Warrington Application Centre
Tel: 44 1925 413537
Fax: 44 1925 242808
After Hours: 44 113 242 3400

USA
Charlotte Application Centre
Tel: 1 704 393 3366
Fax: 1 704 393 0900
After Hours: 1716 692 2442

Chicago Drive Centre
Tel: 1 630 893 5249
Fax: 1 630 893 4156

Cleveland Drive Centre
Tel: 1 440 717 0123
Fax: 1 440 717 0133

Minneapolis Application Centre
Tel: 612 474 1116
Fax: 612 474 8711

Dallas Application Centre
Tel: 1 972 783 1831
Fax: 1 972 783 9978
After Hours: 1800 759 0664

Providence Drive Centre
Tel: 1 401 333 3331
Fax: 1 401 333 6330
After Hours: 1401 333 0080

VIETNAM
Ho Chi Minh Application Centre
Tel: 84 8 842 5157
/84 8 849 1980
Fax: 84 8 842 5157